


# Mod. "MK"

## "MK" SERIES DIRECT READING FLOWMETER

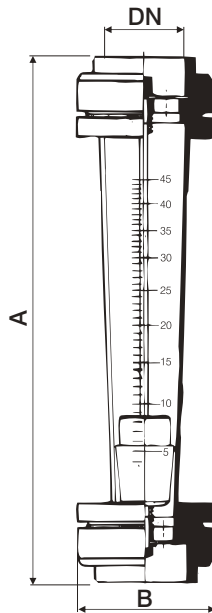

TIPO	WATER Lt/h	AIR Nmc/h	ATTACCHI FILETTATI threaded connections DN	A	B
MKF	320	6	1/2"	430	80
	420	8	3/4"		
	600	10	1"		
	800				
MKE	1200	20	3/4"	430	80
	1500		1"		
MKD/4	2000	40	3/4"	430	100
	2500		1"		
	3500				
MKD/5	4000	60	1"	430	100
	5000		1"1/4"		
	6000		1"1/2"		
MKC	5000	80	1"1/2"	540	100
	6000		2"		
	8000				
MKB	10000	130	1"1/2"	540	120
	12500		2"		
	15000				
MKA	20000	160	2"	540	140
	25000				
	30000	250	2"1/2"		
	37000		3"		
	45000				

### "MK" SERIES DIRECT READING FLOWMETER

The union connections allow rapid installation and reduce maintenance times.

The structure is in antacid PVC, but, on request, they can be produced in polypropylene, thereby allowing an increase in max. operating temperature up to 100°C. The float is made of AISI 316, but for particular requirements, it can be made of PVC, PTFE etc. **On request, it can be equipped with a min/max flow rate indicator.** Maximum test pressure: 10 bar. Accuracy: ±5%