


Mod. "R" e "PL"

PLEXIGLASS FLOWMETERS FOR MEDIUM FLOW "R" AND "PL"

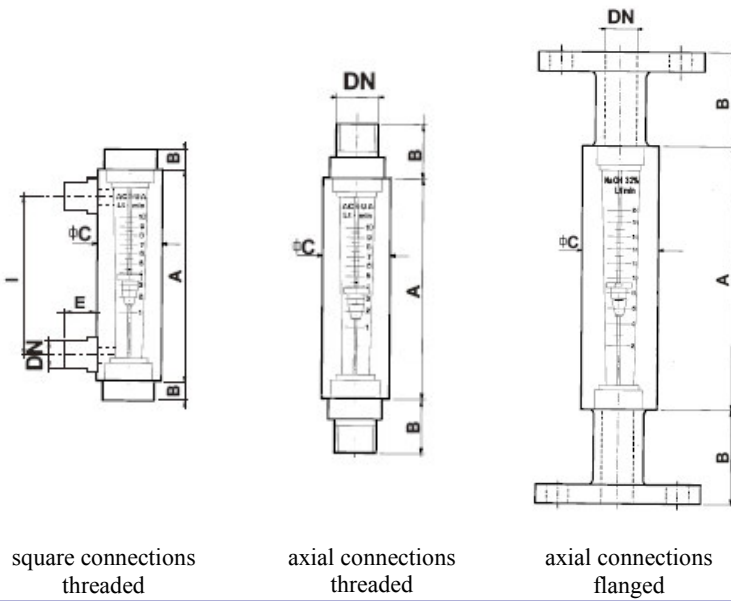

TIPO	portate standard		attacchi filettati				attacchi flangiati			
	WATER	AIR	threaded connection			flanged connection				
	Lt/h	Nmc/h	DN	A	B	C	DN	A	B	C
R-1	120	6								
	200									
	300	8	1/2"	127	35	40	15	127	60	35
	400									
	500	10								
R-2	600		1/2"				15			
	800	15								
	1200		3/4"	160	40	45	20	160	80	40
	1500	25								
	2000		1"				25			
R/3	3000	40	1"	190	40	50	25	190	80	45
	4000									
R/4	6000	60	1"							
	8000		1"1/4	190	40	60	40	190	80	60
	12000	100	1"1/2							

TIPO	portate standard		attacchi filettati				attacchi flangiati			
	WATER	AIR	threaded connection			flanged connection				
	Lt/h	Nmc/h	DN	A	B	C	DN	A	B	C
PL/1	200	6								
	400	8	1/2"	180	35	40	15	180	60	35
	600	10								
PL/2	800	15	1/2"				15			
	1200		3/4"	220	40	45	20	220	80	40
	2000	25	1"				25			
PL/3	4000	40	1"	260	40	50	25	260	80	45
PL/4	6000	60	1"1/2	260	40	60	40	260	80	60
PL/5	10000		1"1/2				40			
	15000	100	2"	260	40	75	50	260	80	75
	20000		2"1/2				65			
	30000		2"1/2				65			

TIPO	SQUARE CONNECTION					
	DN	A	B	C	E	I
R/1	3/8" - 1/2"	127	15	40	40	95
R/2	1/2" - 3/4" - 1"	160	15	45	45	115
R/3	3/4" - 1"	190	15	50	50	125

TIPO	SQUARE CONNECTION					
	DN	A	B	C	E	I
PL/1	3/8" - 1/2"	180	15	40	35	145
PL/2	1/2" - 3/4" - 1"	220	15	45	35	175
PL/3	3/4" - 1"	260	15	50	40	195

PLEXIGLASS FLOWMETERS FOR MEDIUM FLOW "R" AND "PL"

The "R" and "PL" series flowmeters are produced entirely in Plexiglas with a calibrated and polished conical measuring hole obtained directly in the structure. The guided or free float is produced in different materials: AISI 316, Hastelloj, PVC, PTFE, Moplen etc. They are provided, on request, with axial or angle, flanged or threaded connections.

The precision of the instrument is: $\pm 5\%$ fs.

The test pressure is 10 bars.

They can be produced, on request, for PN16, PN25, PN40.