


Mod. "R-R"

PLEXIGLASS FLOWMETERS FOR MEDIUM FLOW WITH NEEDLE VALVE

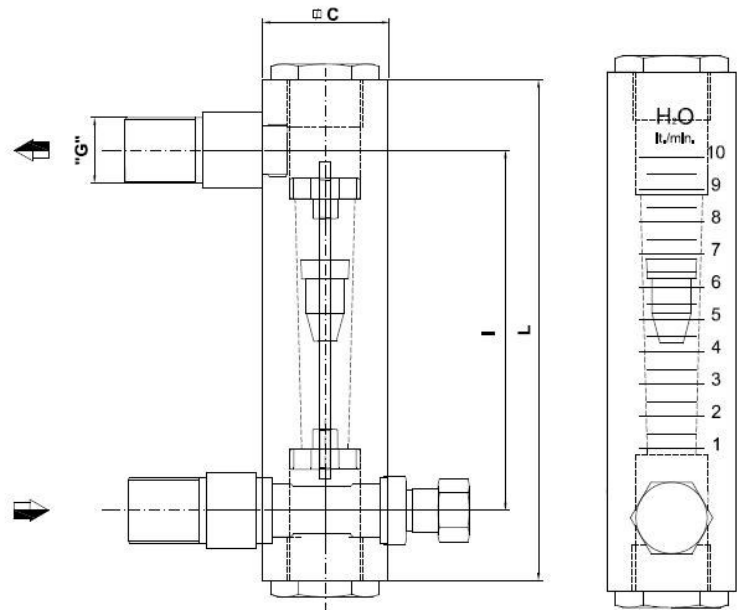

TIPO	portate standard		attacchi filettati			
	WATER	AIR	threaded connection			
	Lt/h	Nmc/h	G	L	I	C
R-1/R	120	6	3/8" - 1/2"	160	115	40
	200					
	300	8				
	400					
	500	10				
R-2/R	600	15	3/8" - 1/2"	190	140	45
	800					
	1200					
	1500					
	2000					

PLEXIGLASS FLOWMETERS FOR MEDIUM FLOW "R-R" WITH NEEDLE VALVE

The "R-R" series flowmeters with needle valve are produced entirely in Plexiglas with guided float produced in different materials: AISI 316, Hastelloj or PVC for aggressive liquid.

They are equipped with nickel-plate brass rear needle valve. The precision of the instrument is: $\pm 5\%$ fs.

The test pressure is 10 bars.